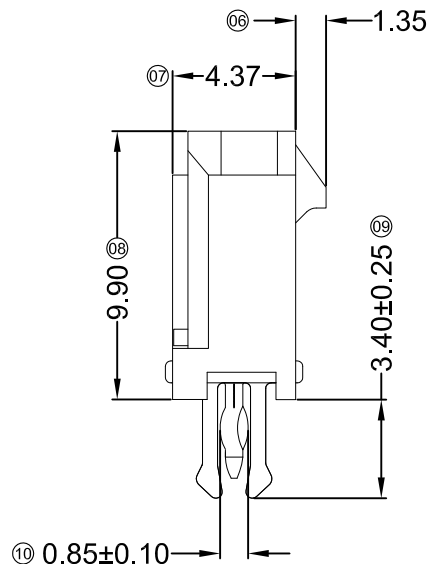
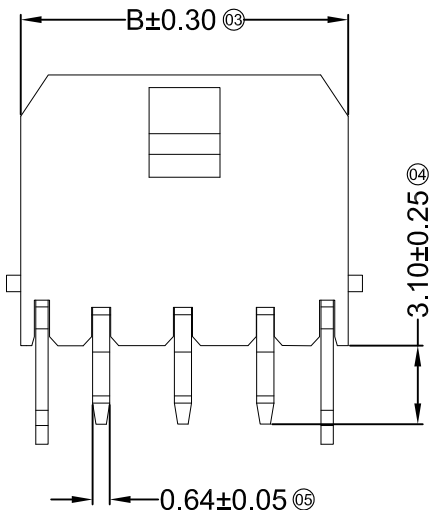

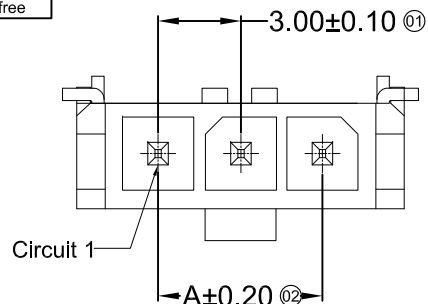


Recommended P.C.B Layout
General Tolerance±0.05

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 W V X-XX C-XX SN XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V- Straight 180°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: XX-02P~12P
⑥ Plug the Pin & Special No.: C-With Harpoon
⑦ Material: N0-PA66 94V-0; LCP-LCP 94V-0
⑧ Planting Category: SN-Bright tin plating
⑨ Color: Blank-Natural Color

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	3.00	9.65	08	21.00	27.65
03	6.00	12.65	09	24.00	30.65
04	9.00	15.65	10	27.00	33.65
05	12.00	18.65	11	30.00	36.65
06	15.00	21.65	12	33.00	39.65
07	18.00	24.65			

3025WV-XXC-N0SN	PA66 UL 94V-0	Brass	Tin-Plated	3025H
3025WV-XXC-LPSN	LCP UL 94V-0			
PART N0	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL
TOLERANCE

X ±0.30
.XX ±0.20
.XXX ±0.10

 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2007/05/03

PART NO.


3025WV-XXC-XXSN

TITLE

3.00 mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1:1	A-016	E

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

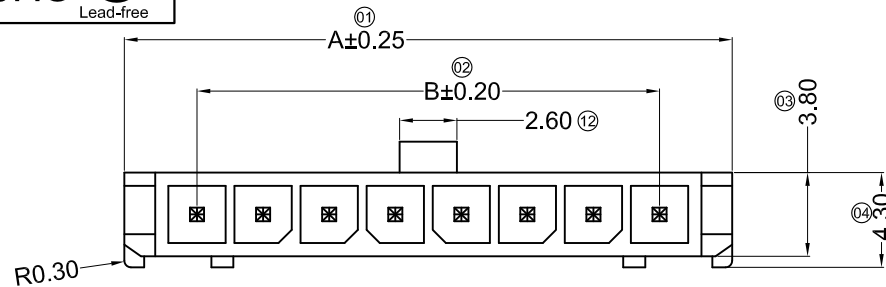


■ Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Mates With ADZL Housing: 3025HM-XX

3025 W V XX X X- XX XX XX - 01



- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V- Straight 180°
④ Row No.-Pin No.: XX-02P~12P
⑤ Plug the Pin & Special No.: K- With Kink
⑥ Plastic shape & Special No.: W-Column Free
⑦ Material: N0-PA66 94V-0 ; LP-LCP 94V-0
⑧ Planting Category: SN-Bright tin plating
V01-Gold Flash
⑨ Color: Blank-Natural Color
⑩ Mold No./Mark/Special No.

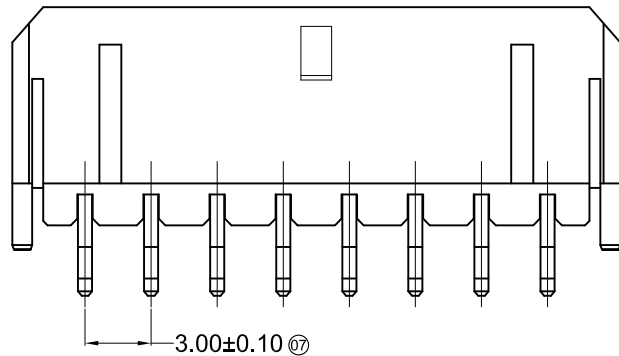


3025WV-XXK-XXXXX-01




3025WV-XXKW-XXXXX-01




3025WV-XX-XXXXX-01




3025WV-XXW-XXXXX-01

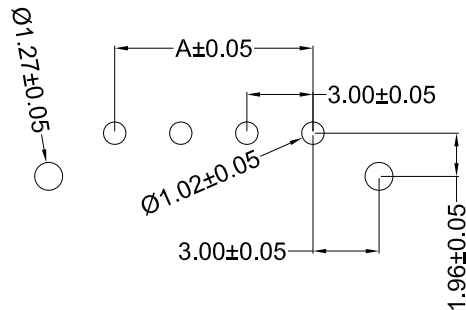

P.C.B LAYOUT

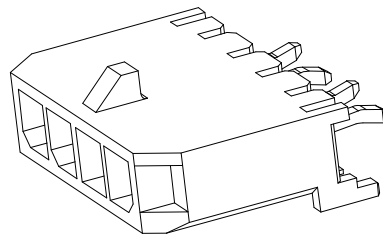



Positions	Dimension	
	A	B
2	9.60	3.00
3	12.60	6.00
4	15.60	9.00
5	18.60	12.00
6	21.60	15.00
7	24.60	18.00
8	27.60	21.00
9	30.60	24.00
10	33.60	27.00
11	36.60	30.00
12	39.60	33.00

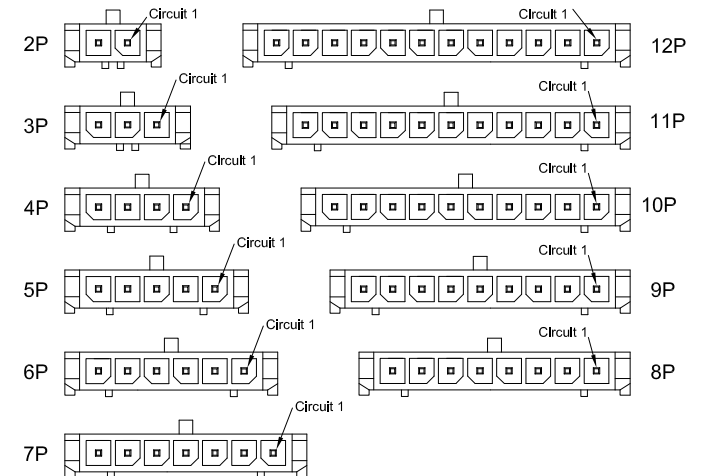GENERAL
TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10 东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD.PART NO.
3025WV-XXXX-XXXXX-01TITLE
3.00mm Crimp Style ConnectorsPROJECT


APPROVAL	CHECK	DRAWN	DATE
Ken	Zhao Hong	Allen	2022/12/10

UNIT MM	SCALE 1:1	NUMBER	REV C
------------	--------------	--------	----------

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

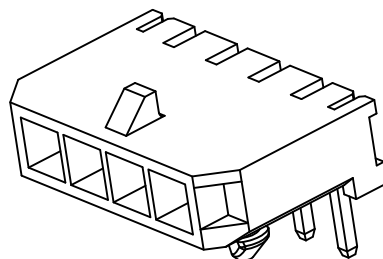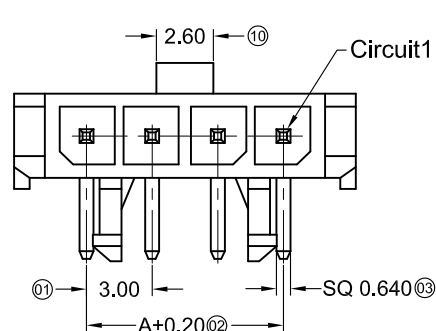







■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Mates With ADZL Housing: 3025HM-XX


3025 W R XX X X- XX XX XX - 01

(1) (2) (3) (4) (5) (6) (7) (8) (9) (10)

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: R- Straight 90°
- ④ Row No.-Pin No.: XX-02P~12P
- ⑤ Plug the Pin & Special No.:
- ⑥ Plastic shape & Special No.:W-Column Free
- ⑦ Material: N0-PA66 94V-0 ; LP-LCP 94V-0
- ⑧ Planting Category: SN-Bright tin plating
V01-Gold Flash
- ⑨ Color: Blank-Natural Color
- ⑩ Mold No./Mark/Special No.

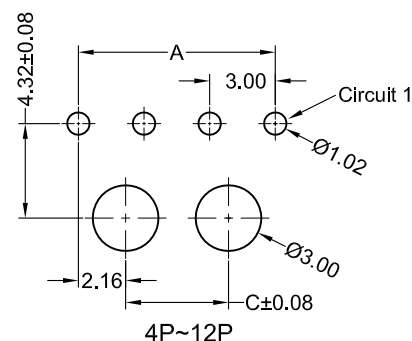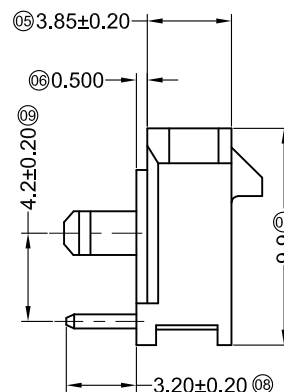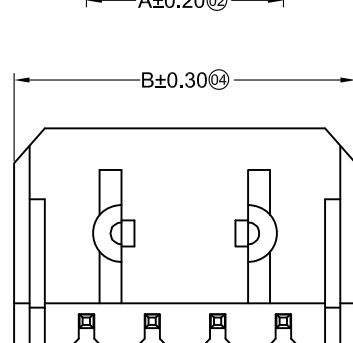

Recommended P.C.B Layout
General Tolerance±0.05

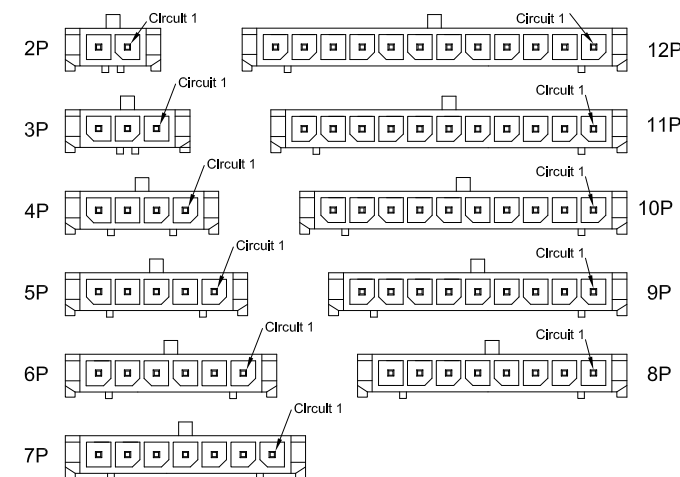

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
01	---	6.65	---	07	18.00	24.65	13.70
02	3.00	9.65	---	08	21.00	27.65	16.70
03	6.00	12.65	---	09	24.00	30.65	19.70
04	9.00	15.65	4.70	10	27.00	33.65	22.70
05	12.00	18.65	7.70	11	30.00	36.65	25.70
06	15.00	21.65	10.70	12	33.00	39.65	28.70

GENERAL
TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD.


PART NO.

3025WR-XXX-XXXXX-01

TITLE

3.00mm Crimp Style Connectors

PROJECT



APPROVAL

Ken

CHECK

Zhao Hong

DRAWN

Allen

DATE

2022/12/21

UNIT

MM

SCALE

1:1

NUMBER

8

REV

D

DATE

OLD REV

NEW REV

ECN






DESCRIPTION

CHECK

APPROVAL

RoHS

TEL:0769-82285488

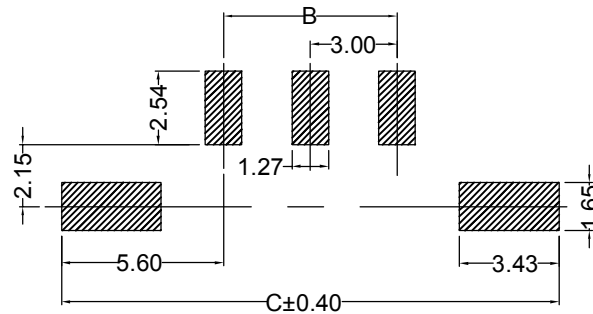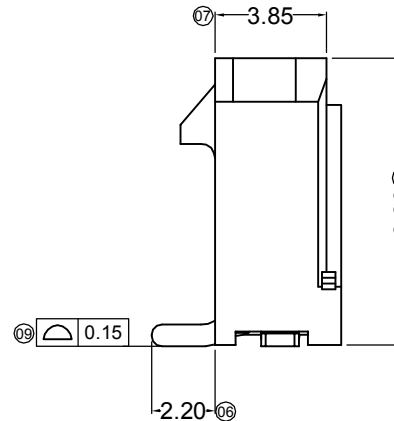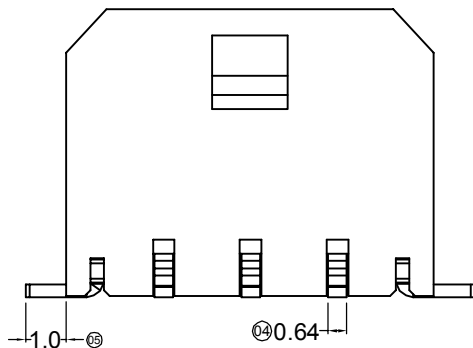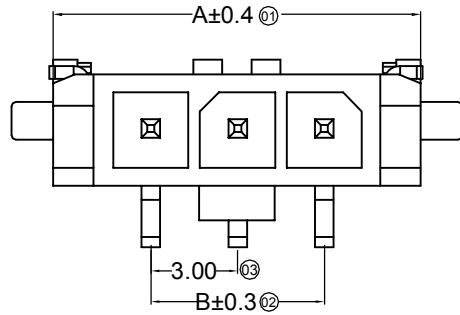

P.C.B. LAYOUT

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 W V S- XX D-LP XX XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V-180°
④ Welding Way: S-SMT
⑤ Row No.-Pin No.: XX-Single row
⑥ Special NO.: D-Solder Tabs
⑦ Material: LP-LCP 94V-0
⑧ Planting Category: SN-Bright tin plating
SW-Matte Tin plating
⑨ Color: Blank-natural color

Poles	Dimensions(mm)		
	A	B	C
02	9.70	3.00	14.20
03	12.70	6.00	17.20
04	15.70	9.00	20.20
05	18.70	12.00	23.20
06	21.70	15.00	26.20
07	24.70	18.00	29.20
08	27.70	21.00	32.20
09	30.70	24.00	35.20
10	33.70	27.00	38.20
11	36.70	30.00	41.20
12	39.70	33.00	44.20

3025WVS-XXD-LPSW	LCP UL 94V-0	Brass	Matte Tin Plated	Brass	Matte Tin Plated	3025H
3025WVS-XXD-LPSN	LCP UL 94V-0		Tin-Plated		Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With ADZL Housing

GENERAL TOLERANCE

.X ±0.30
.XX ±0.20
.XXX ±0.10

ADZL 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA



PROJECT

Ken Wisely He Allen 2007/05/03

PART NO. 3025WVS-XXD-LPXX

TITLE 3.00mm Crimp Style Connectors




DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	UNIT	SCALE	NUMBER	REV
							MM	1:1	A-106	E

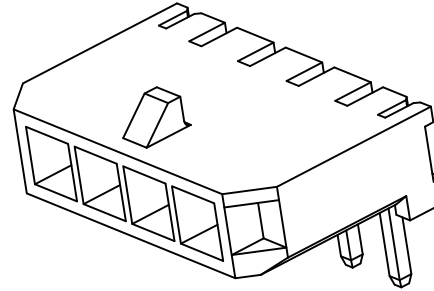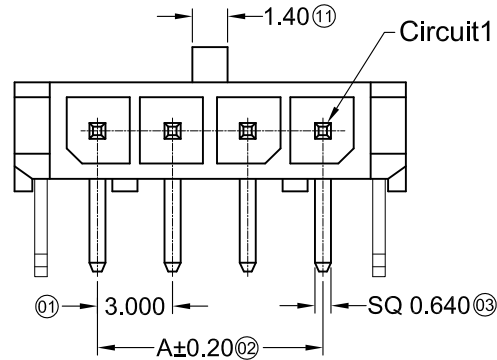**Specifications :**

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 W R X - XX C - XX SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: R-90°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: XX-01P~12P
⑥ Plug the Pin & Special No.: C-The harpoon
⑦ Material: LP-LCP 94V-0 ;
PT-PBT 94V-0
⑧ Planting Category: SN-Bright tin plating
⑨ Color: Blank-Natural Color Black

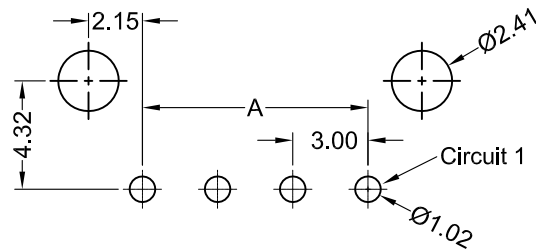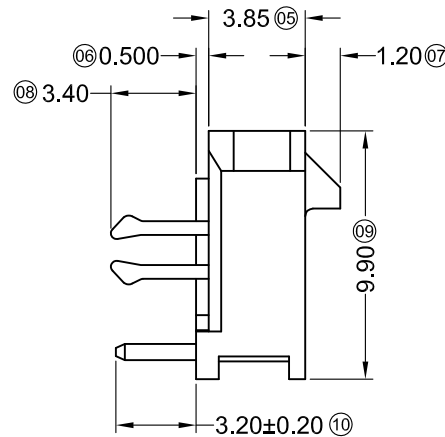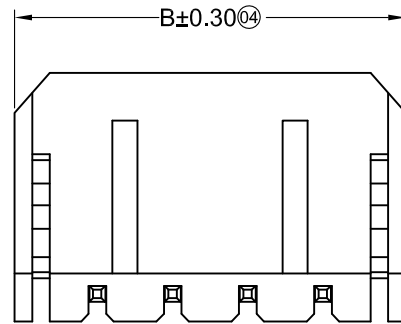


Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
01	---	6.65	07	18.00	24.65
02	3.00	9.65	08	21.00	27.65
03	6.00	12.65	09	24.00	30.65
04	9.00	15.65	10	27.00	33.65
05	12.00	18.65	11	30.00	36.65
06	15.00	21.65	12	33.00	39.65



3025WR-XXC-PTSN	PBT UL 94V-0	Brass	Tin-Plated	3025H
3025WR-XXC-LPSN	LCP UL 94V-0			
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD	PART NO. 3025WR-XXC-XXSN						
									TITLE 3.00mm Crimp Style Connectors						
									APPROVAL	CHECK	DRAWN	DATA			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Wisely He	Allen	2015/05/05	UNIT MM	SCALE 1 : 1	NUMBER A-089	REV A

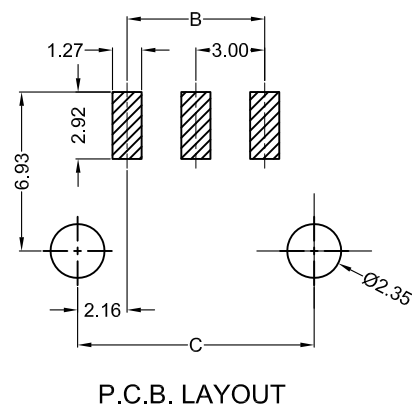

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$


Poles	Dimensions (mm)		
	A	B	C
02	6.85	3.00	7.30
03	9.85	6.00	10.30
04	12.85	9.00	13.30
05	15.85	12.00	16.30
06	18.85	15.00	19.30
07	21.85	18.00	22.30
08	24.85	21.00	25.30
09	27.85	24.00	28.30
10	30.85	27.00	31.30
11	33.85	30.00	34.30
12	36.85	33.00	37.30

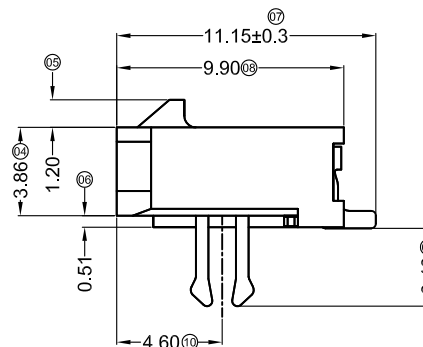


3025 W R S- XX C-LP SW XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: R-90°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: XX-Single row
- ⑥ Special NO.: C-The harpoon
- ⑦ Material: LP-LCP 94V-0
- ⑧ Planting Category: SW-Fog Tin plating
- ⑨ Color: Blank-natural color




2P




3P




4P




5P




6P




7P




8P




9P



10P





11P



12P

3025WRS-XXC-LPSW	LCP UL 94V-0	Brass	Matte Tin-Plated	Brass	Tin-Plated	3025H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD				PART NO. 3025WRS-XXC-LPSW			
												TITLE 3.00 mm Crimp Style Connectors			
								APPROVAL	CHECK	DRAWN	DATA	UNIT MM	SCALE 1 : 1	NUMBER A-106	REV E
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Wisely He	Allen	2017/05/03				

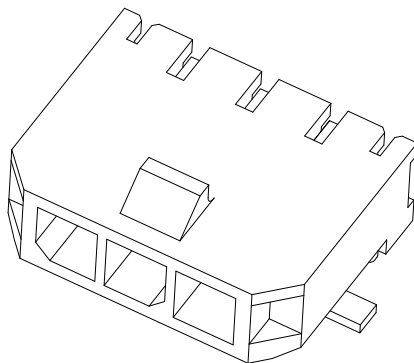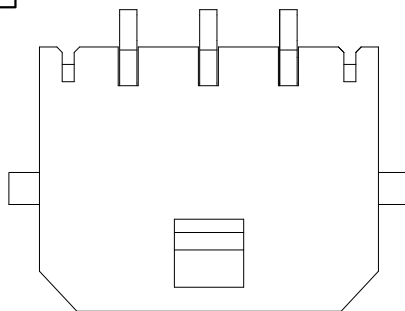




Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

3025 W R S- XX D-LP SW XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
 ② Category: W-wafer
 ③ Welding Board Angle: R-90°
 ④ Welding Way: S-SMT
 ⑤ Row No.-Pin No.: XX-Single row
 ⑥ Special NO.:D-Solder Tabs
 ⑦ Material: LP-LCP 94V-0
 ⑧ Planting Category: SW-Matte Tin plating
 ⑨ Color: Blank-natural color

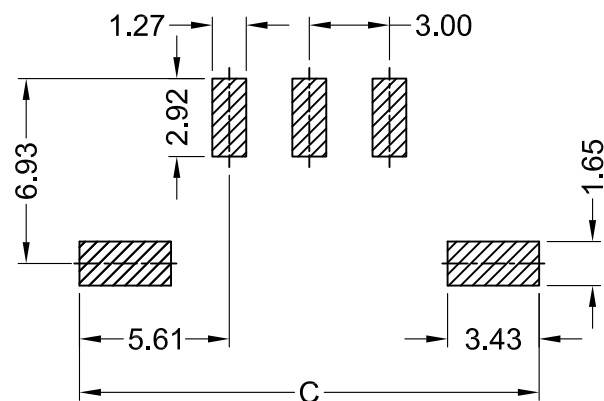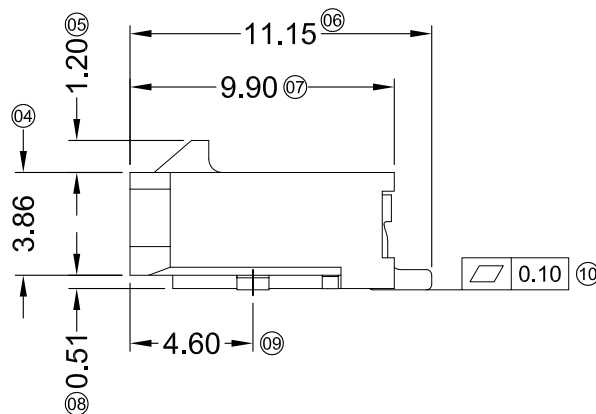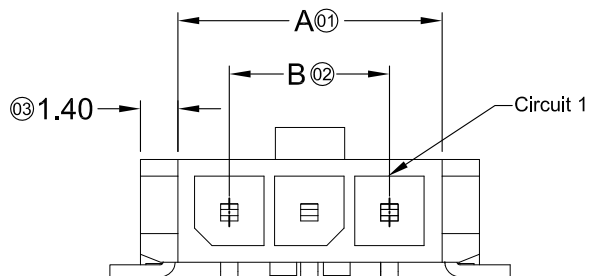

P.C.B. LAYOUT

Poles	Dimensions		
	A	B	C
2	6.85	3.00	14.20
3	9.85	6.00	17.20
4	12.85	9.00	20.20
5	15.85	12.00	23.20
6	18.85	15.00	26.20
7	21.85	18.00	29.20
8	24.85	21.00	32.20
9	27.85	24.00	35.20
10	30.85	27.00	38.20
11	33.85	30.00	41.20
12	36.85	33.00	44.20

3025WRS-XXD-LPSW			Matte Tin Plating	Brass	Matte Tin-Plated	3025H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With ADZL Housing

GENERAL TOLERANCE
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10

 思量连接器有限公司
 ADZL CONNECTORS CO.,LTD

PART NO.
 3025WRS-XXD-LPXXX

TITLE
 3.00 mm Crimp Style Connectors

APPROVAL CHECK DRAWN DATA

PROJECT


Ken Wisely He Allen 2007/05/03

UNIT SCALE NUMBER REV
 MM 1:1 A-053 E

DATE OLD REV NEW REV ECN DESCRIPTION CHECK APPROVAL

RoHS

WWW. ADZLCONN. COM

TEL:0769-82285488

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 H F-XX XX-XX XX






① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: H-HSG
③ Welding Board Angle: F-Female HSG
④ Row No.-Pin No.: XX-02P~12P
⑤ Plug the Pin & special No.: I-Without Ears
G-With Ears
⑥ Material: N2-PA66 94V-2; N0-PA66 94V-0
⑦ Color: Blank-Black

Poles	Dimensions(mm)			
	A	B	C	D
02	3.00	6.90	7.21	10.89
03	6.00	9.90	10.21	13.89
04	9.00	12.90	13.21	16.89
05	12.00	15.90	16.21	19.89
06	15.00	18.90	19.21	22.89
07	18.00	21.90	22.21	25.89
08	21.00	24.90	25.21	28.89
09	24.00	27.90	28.21	31.89
10	27.00	30.90	31.21	34.89
11	30.00	33.90	34.21	37.89
12	33.00	36.90	37.21	40.89

3025HF-XXG-N2	Nylon 66 94V-2	Natural Color	3025TM	3025HM	With Ears
3025HF-XXG-N0	Nylon 66 94V-0	Natural Color			
3025HF-XXI-N2	Nylon 66 94V-2	Natural Color			
3025HF-XXI-N0	Nylon 66 94V-0	Natural Color	3025TM	3025HM	Without Ears
PART NO	Material	Color	Suitable ADZL Terminal	Mates With ADZL Housing	Note

With Ears Recommended P.C.B Layout
General Tolerance±0.05 T=1.60~2.40mm

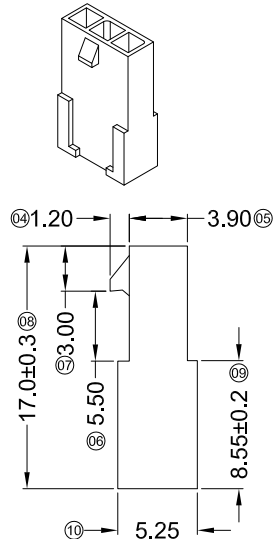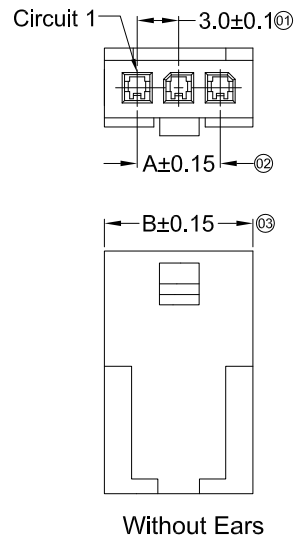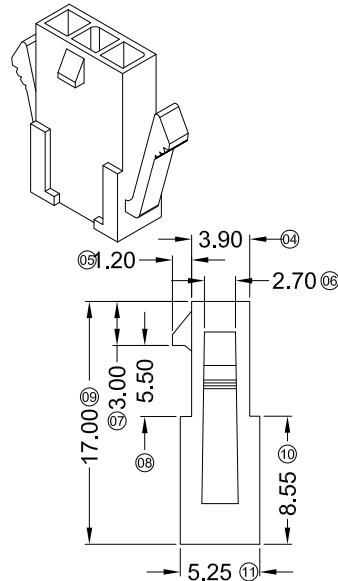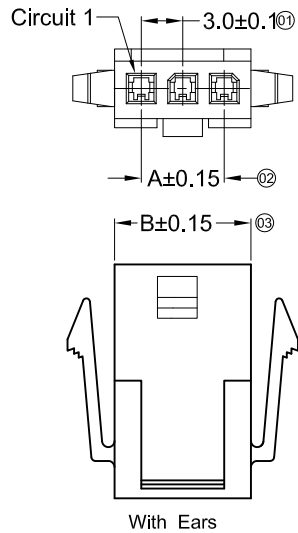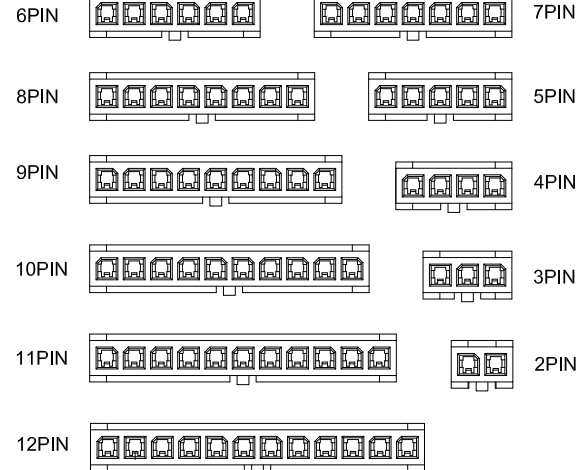

GENERAL TOLERANCE

.X ±0.30
.XX ±0.20
.XXX ±0.10

PROJECT



东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD.

APPROVAL CHECK DRAWN DATA

Ken Zhao Hong Allen 2024/05/18

PART NO.







3025HF-XXX-XX

TITLE


3.00 mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1:1		

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

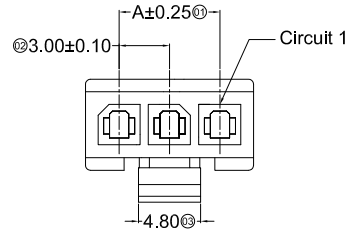

2P




Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ


3025 H M-XX X-XX XX

① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: M-Male HGS
- ④ Row No.-Pin No.: XX-02P~12P
- ⑤ Plug the Pin & special No.
- ⑥ Material: N2-PA66 94V-2 N0-PA66 94V-0
- ⑦ Color: Blank-Black




2PIN




5PIN




8PIN




11PIN




3PIN




6PIN




9PIN




12PIN



4PIN



7PIN



10PIN

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
03	6.00	9.85	08	21.00	24.85
04	9.00	12.85	09	24.00	27.85
05	12.00	15.85	10	27.00	30.85
06	15.00	18.85	11	30.00	33.85
07	18.00	21.85	12	33.00	36.85

3025HM-XX-XX	Nylon 66 94 V-2/V-0	3025TF	3025W
PART NO	Material	Suitable ADZL Terminal	Mates With ADZL Wafer

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10



东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD.

PART NO. 3025HM-XX-XX

TITLE 3.00 mm Crimp Style Connectors

PROJECT



APPROVAL

Ken

CHECK

Zhao Hong

DRAWN

Allen

DATA

2024/05/18

UNIT
MM

SCALE
1:1

NUMBER

REV

DATE

OLD REV

NEW REV

ECN

DESCRIPTION

CHECK

APPROVAL

RoHS

WWW.ADZLCONN.COM

TEL:0769-82285488



Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 T F-P XX X-01

01 02 03 04 05 06 07

- 01 Series Number
02 Category: T-terminal
03 Shape: F-Female Terminal
04 Material: P-Phosphor bronze
05 Plating style:
G30- Contact point gold 30u "(inside) Gold area1u"(outside)
Other area Ni 20u" Min
G15- Contact point gold 15u "(inside) Gold area1u"(outside)
Other area Ni 20u" Min
G01-Contact Area Gold Flash
SN-Bright tin plating
06 Plating method:
Blank-Stamping before plating
07 Mold No./Mark/Special No.

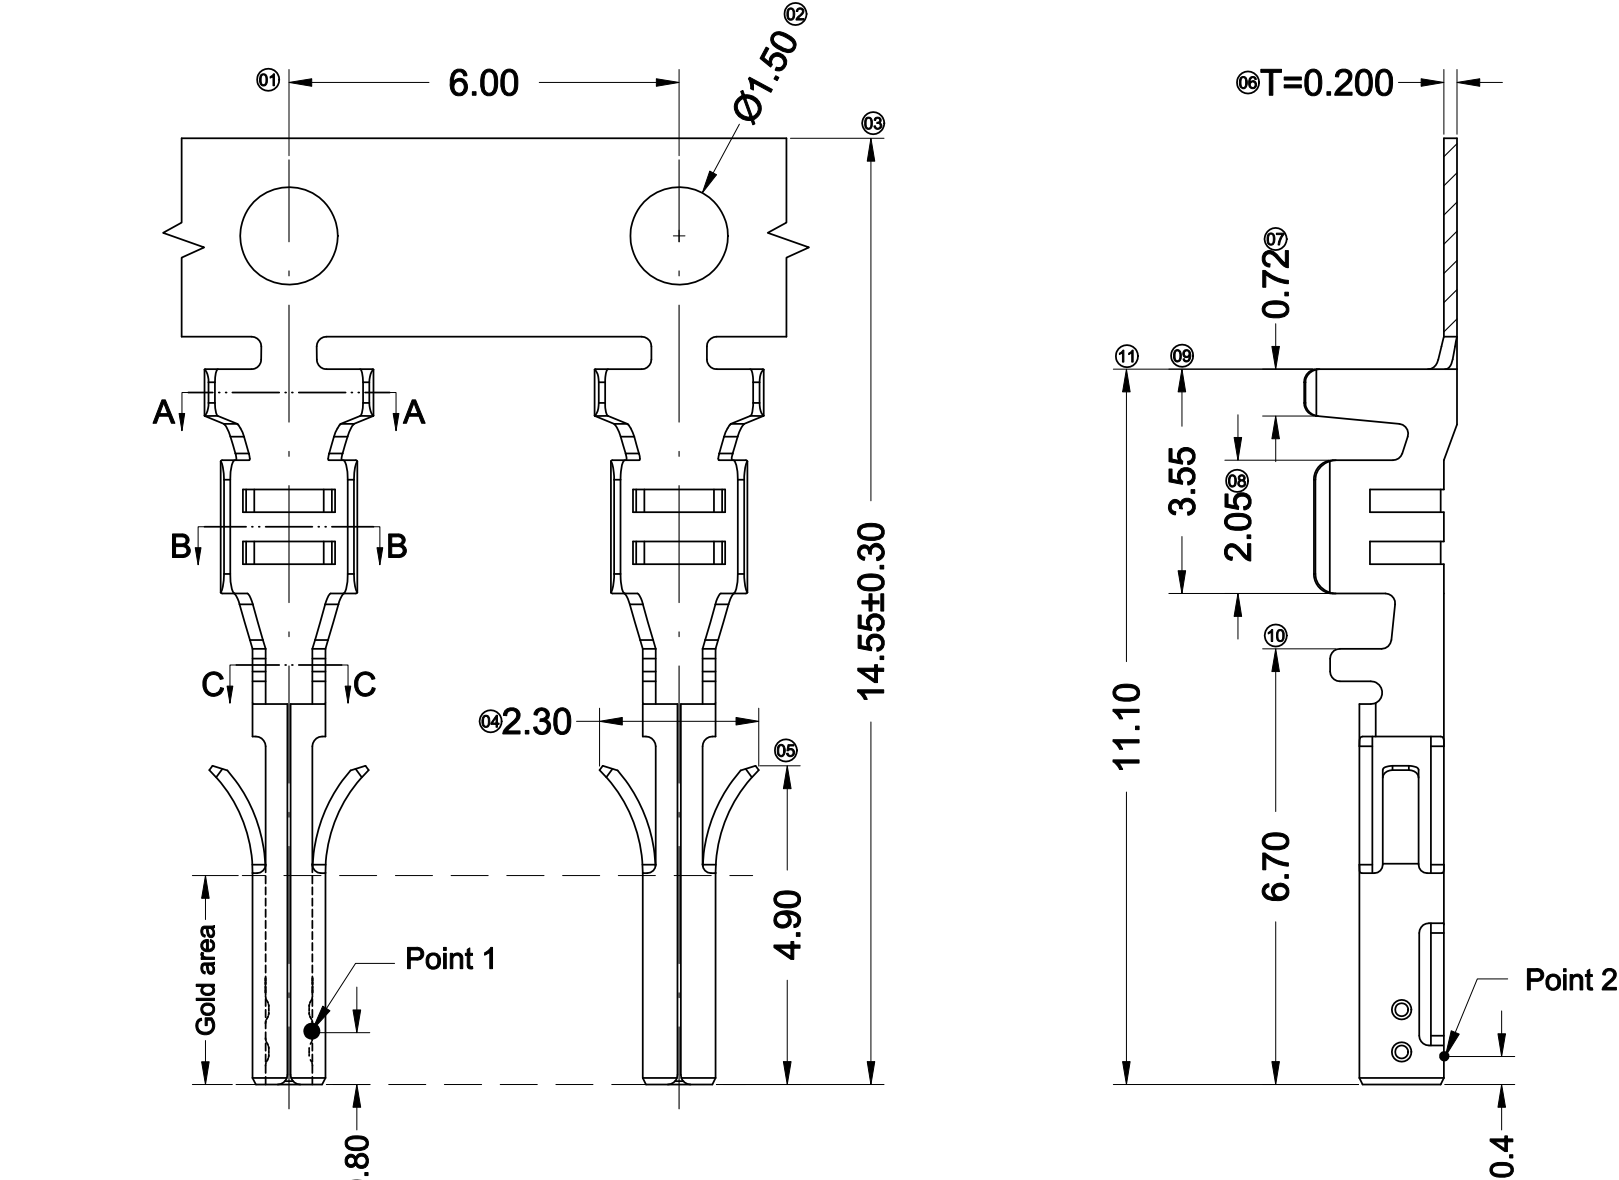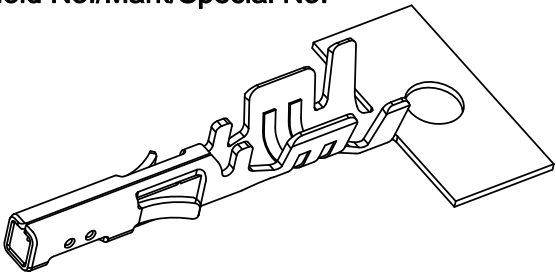


3025TF-PG30-01	Phosphor Bronze	AWG#20-24	1.85mm(Max)	Stamping Before Pating:20u" Min. Ni; Contact Area Gold:30u" Min.	Point 1	3025HM
3025TF-PG15-01				Stamping Before Pating:20u" Min. Ni; Contact Area Gold:15u" Min.		
3025TF-PG01-01				Stamping Before Pating:50u" Min. Ni; Contact Area Gold Flash	Point 2	
3025TF-PSN-01				Stamping Before Plating:50u" MIN. Ni; 100u" MIN. Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Plating measuring point	Used In ADZL Housing

							GENERAL TOLERANCE		PART NO. 3025TF-PXXX-01			
							.X	±0.20				
							.XX	±0.20	TITLE 3.00mm Crimp Style Connectors			
							.XXX	±0.10				
							PROJECT		APPROVAL	CHECK	DRAWN	DATA
							Ken Zhao Hong Allen		2024/12/25			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	UNIT	SCALE	NUMBER	REV		
1							MM	1:1				

RoHS

WWW. ADZLCONN. COM

TEL:0769-82285488

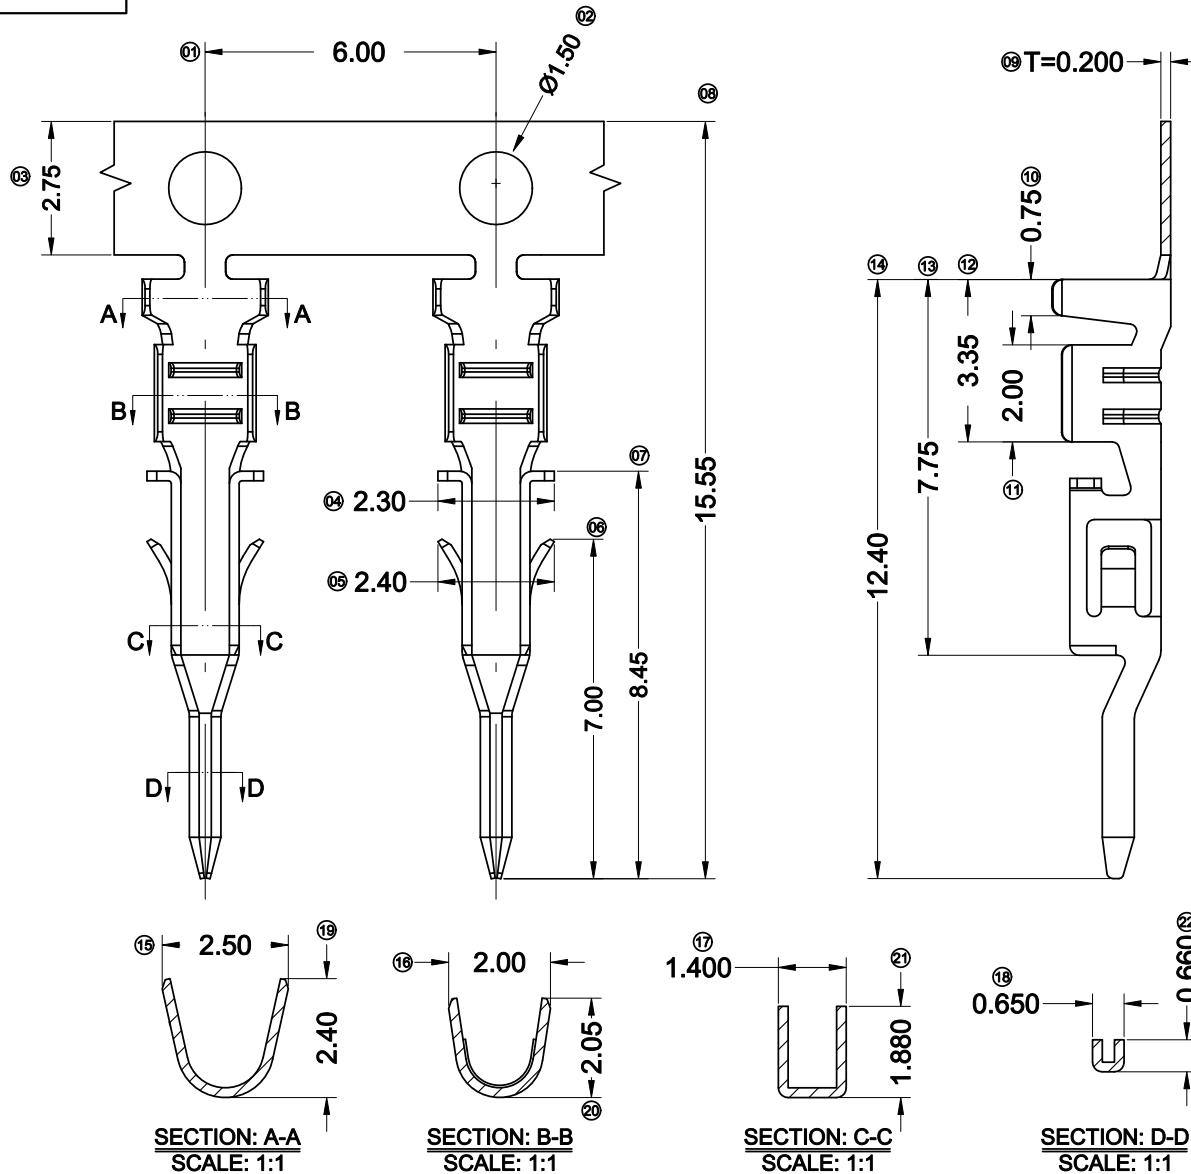
**Specifications :**

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

3025 T M-P XXX X-01

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
- ② Category: T-terminal
- ③ Shape: M-male
- ④ Material: P-Phosphor bronze
- ⑤ Plating style: SN-Bright tin plating
G01-Contact Area Gold Flash
- ⑥ Plating method: Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.

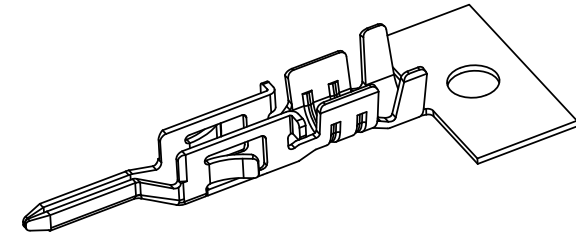

3025TM-PG01-01	Phosphor Bronze	AWG#20-24	1.85mm(Max)	Stamping Before Plating:50u" Min. Ni; Contact Area Gold Flash	3025HF
3025TM-PSN-01				Stamping Before Plating:30u" Ni Min;70u"Sn Min	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In adzl Housing

GENERAL
TOLERANCE

.X ± 0.30
.XX ± 0.20
.XXX ± 0.10

PROJECT



东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD.

APPROVAL

Ken

CHECK

Zhao Hong

DRAWN

Allen

DATA

2025/11/10

PART NO.

3025TM-PXXX-01

TITLE

3.00mm Crimp Style Connectors

UNIT
MMSCALE
1:1

NUMBER

REV

DATE

OLD REV

NEW REV

ECN

DESCRIPTION

CHECK

APPROVAL

1

2

3

4

5

6

7

8